


TITAN™

GAS AIRLESS SPRAYERS

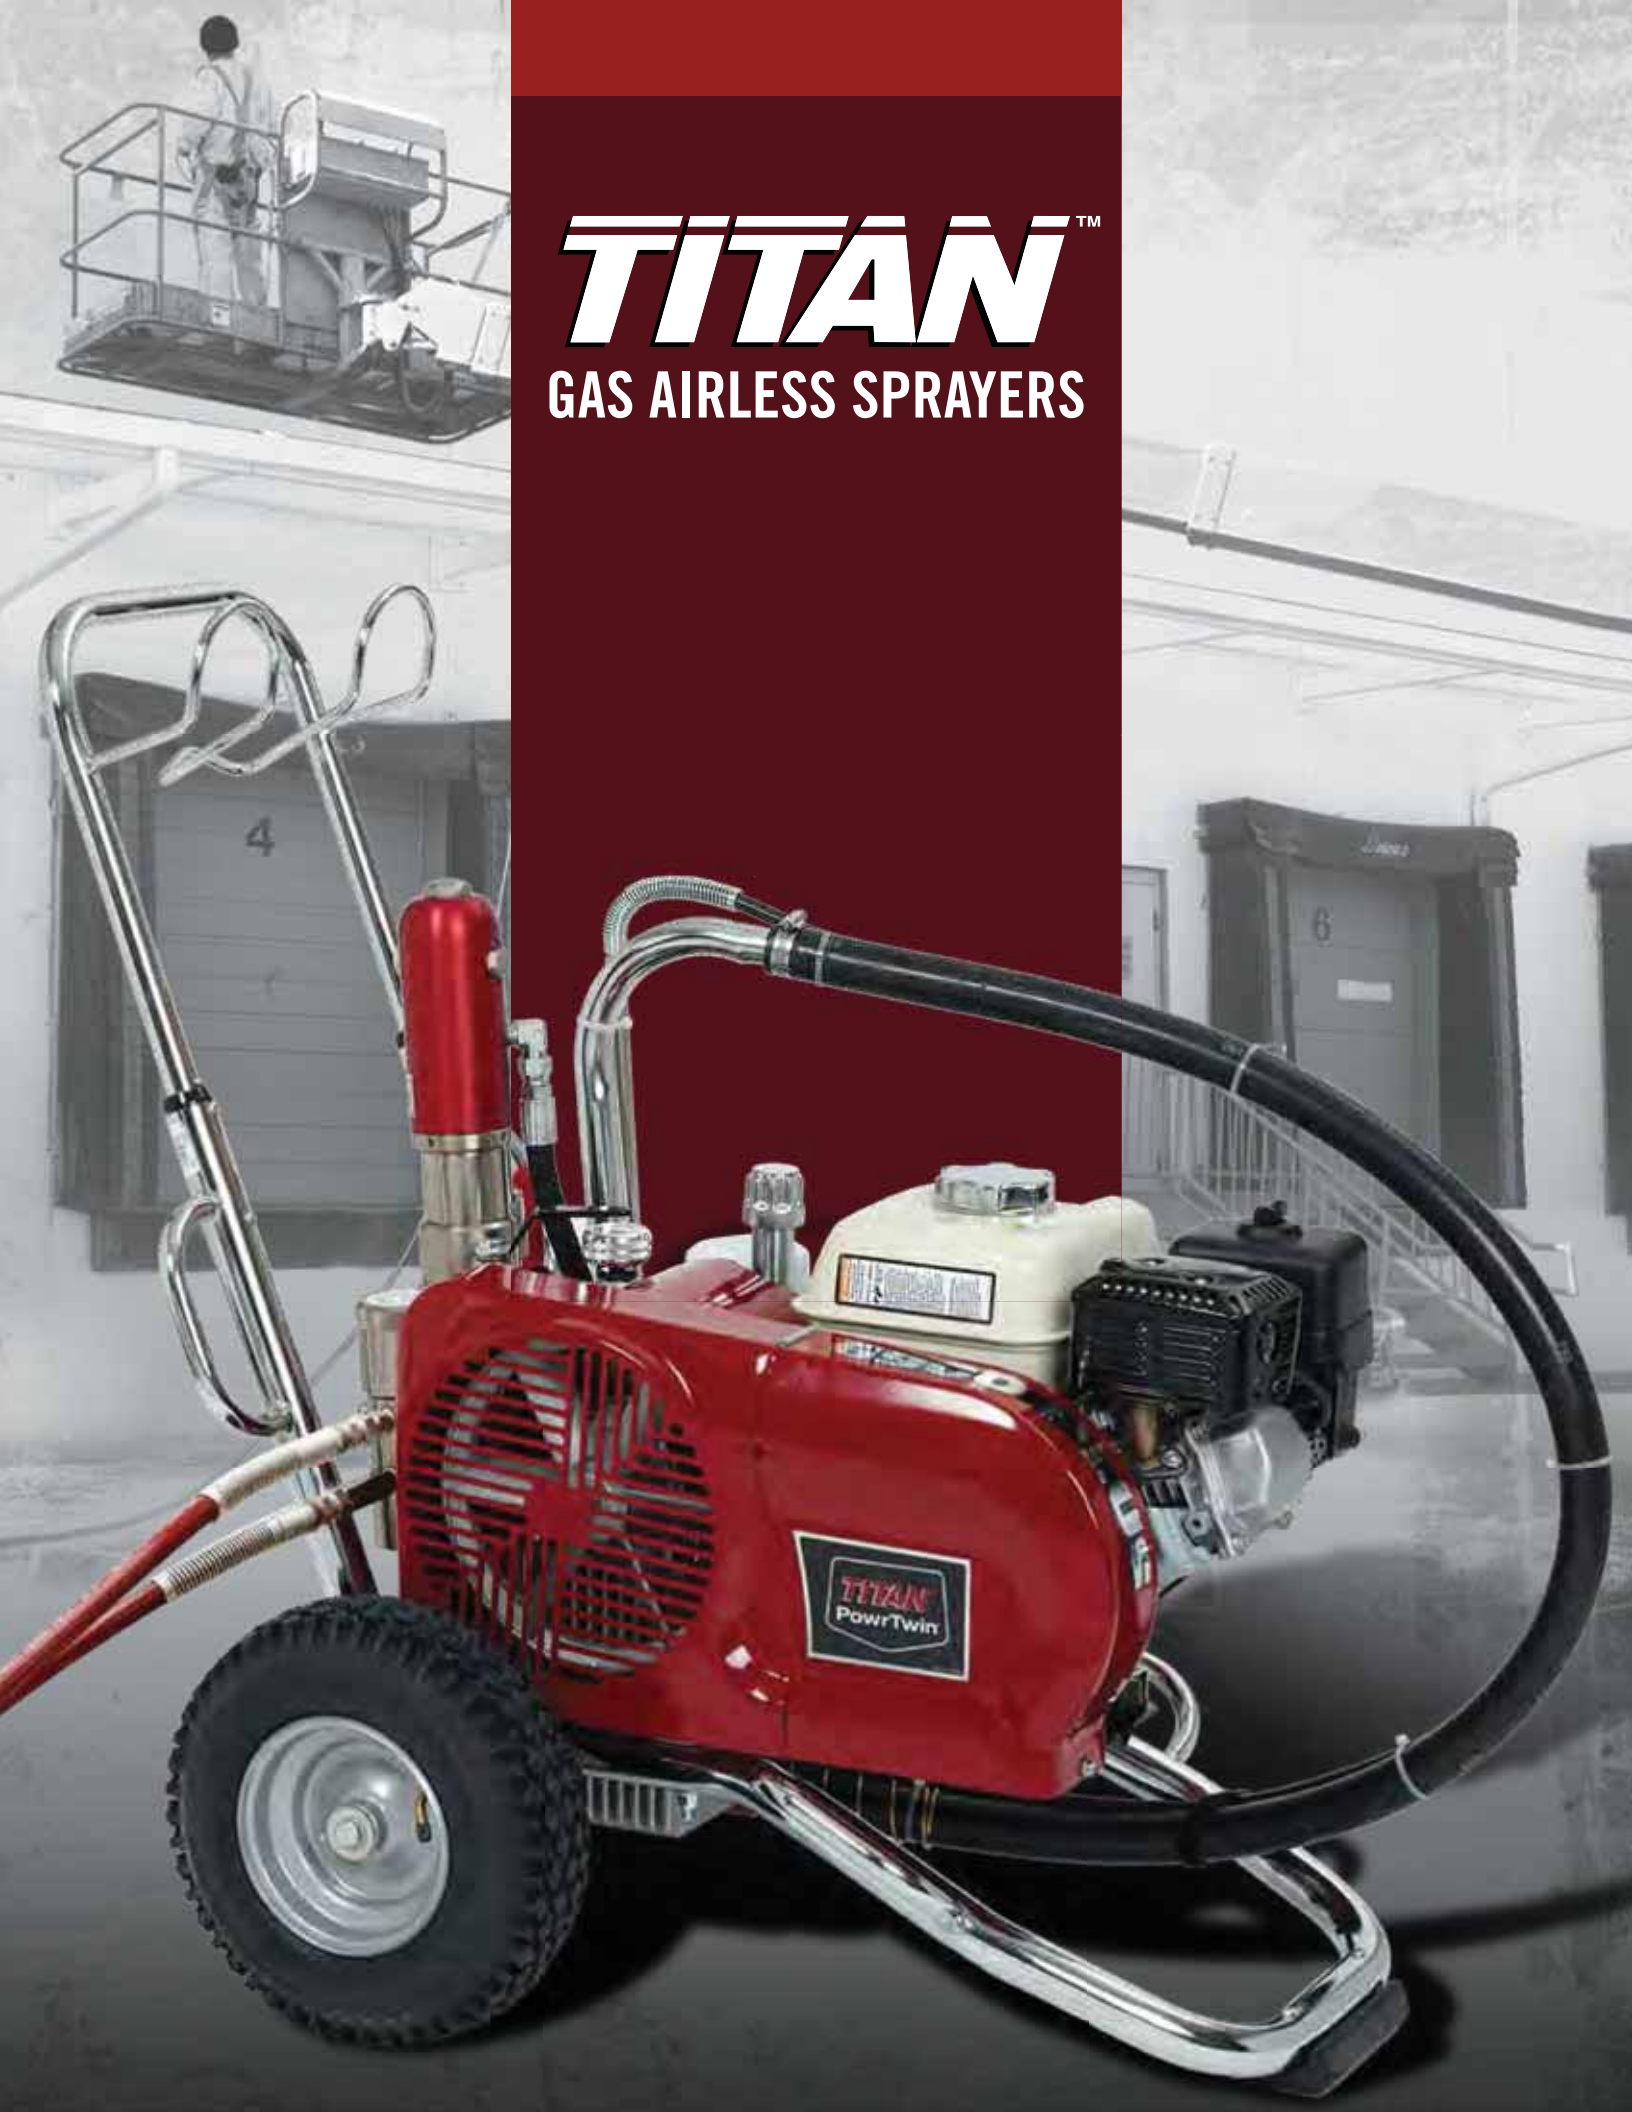

CONTENTS

Gear Driven Gas Pumps	4
ADVANTAGE™ GPX 33	5
ADVANTAGE™ GPX 85	6
ADVANTAGE™ GPX 130	7
ADVANTAGE™ GPX 165	8
ADVANTAGE™ GPX 220	9
Hydraulic Piston Pumps	10
POWRTWIN™ 4900 Plus	11
POWRTWIN™ 6900 Plus	12
POWRTWIN™ 8900 Plus	13
POWRTWIN™ 12000 Plus	14
POWRTWIN™ 6900 Plus DI	15
POWRTWIN™ 12000 Plus DI	16
HYDRA™ Pro IV	18
HYDRA™ M 4000	19
HYDRA™ M 2000	20
Special Coatings Specifications	21
Specifications	22-23
Warranty	24



TITAN™

WHY TITAN GAS AIRLESS SPRAYERS

Titan offers a full range of gas-powered, gear-driven and hydraulic piston sprayers backed by the most powerful warranty in the industry. Our sprayers incorporate the simplicity, durability and reliability that contractors and professionals depend upon to get projects done quickly and perfectly the first time. Whether your applications include occasional property maintenance or full-scale industrial projects, a single room or an aircraft carrier, we have a sprayer designed and built for your needs.

ADVANCED PERFORMANCE

- Our sprayers are built for hard work and long life
- The latest engineering technology ensures ease of use and dependability
- Our sprayers meet and exceed the expectations of contractors who want to do the job right the FIRST time.

TOTAL RELIABILITY

- Proven technology - you finish every job quickly and profitably
- Superior design and construction maximizes the service life of your sprayer
- Complete diversity of equipment – we have a sprayer for every application
- Half a century of getting the job done right – TITAN is the name you trust

UNSURPASSED SERVICE

- Dependable, reliable network of authorized sales and service distributors
- The best customer service in the industry to help you select and maintain your sprayer
- Professional application and service representatives ready to assist you with recommendations and technical support

THE BEST AND LONGEST WARRANTY IN THE INDUSTRY

When you purchase a Titan sprayer you purchase performance. We stand behind that assurance and are so confident in the quality of our sprayers that we offer the best and longest warranties in the industry, including:

- 4-Year Manufacturer's Defects - All models except GPX33
- 2-Year Manufacturer's Defects on GPX33
- Lifetime Drive Train Warranty
- 5-Year Subaru Engine Warranty
- 3-Year Honda Engine Warranty
- 35-Day Satisfaction Guarantee
- Express Parts Program
- WearGuard™ Convenience Program

EXTERIOR COMMERCIAL APPLICATIONS



INTERIOR FOUNDATION COATINGS



EXTERIOR INDUSTRIAL APPLICATIONS



ROOF COATINGS



ADVANTAGE™ GPX SERIES

GPX sprayers have a reputation for simple, rugged reliability other brands can only envy. Pound for pound and gallon for gallon, GPX sprayers offer more power and greater value than any gas-powered sprayer in their class.

GPX Gear-Driven Piston Paint Sprayers

- Stainless steel rotating ball valves keep debris from sticking to minimize downtime and maximize performance
- Access and clean the ball valves without damaging packings or removing fluid section
- Industry-leading, heavy-duty, self-aligning clutch
- Patented, one-piece modular pump housing design makes routine service quick and easy – lasts up to 30% longer than competitor gas sprayers
- One-piece, self-adjusting static packings with wiper lip last up to 50% longer; lifetime cylinder warranty means you spray more and worry less
- Reversible inlet and outlet seats last twice as long as standard seats
- Proven engine technology — advanced performance, total reliability and proven overhead cam engines with the most powerful HP to GPM ratio and greater fuel efficiency than overhead valve engines
- Subaru® quiet operation — 33% fewer moving parts makes this one of the quietest engines operating today
- Subaru® easy starting — 30% to 40% less pulling force than other engine brands

STATIC PACKINGS



- Packings are made of high tech material that does not dry out
- No cylinder to wear
- Self adjusting and self-compensating, no packing adjustment nut

ELECTRONIC PRESSURE CONTROL



For precise, consistent pressure (GPX 130-220)



ADVANTAGE™ GPX 33

Titan's Advantage Airless Sprayer GPX33 is the innovative solution to painting where electric power is not available. Its gas engine driven Advantage pump design is the standard used to measure professional quality pumps. Designed for use by handymen, painters, farmers and property managers or for recreational structures spraying up to 300 gallons per year.

***2-year Manufacturers Defect Warranty**



GPX 33

Max. Delivery	.33 GPM
Max. Operating Pressure	3000 PSI
Max. Tip Size	0.017" Max.
Engine	37.7cc
Weight	45 lbs

Includes

- LX-50 Airless Gun
- 517 TR² Reversible Tip
- 1/4" x 50' Airless Hose



ADVANTAGE™ GPX 85

The GPX 85 is ideally suited for new construction, residential repaint and small commercial projects where electricity is not readily available. This high performance, gas-powered airless sprayer will apply most standard architectural primer and coatings quickly, easily and efficiently.

Recommended for medium size projects.

Subaru® 126cc OHC Engine

Overhead cam engines have greater fuel efficiency than overhead valve engines

Reliable Mechanical Pressure Control

Large Paint Filter

Hose Storage Rack
Holds 150' of airless hose

Durable Cart
With telescoping handle

STATIC PACKINGS



- Packings are made of high tech material that does not dry out
- No cylinder to wear
- Self adjusting and self-compensating, no packing adjustment nut

Large Pneumatic Tires

SUBARU GAS ENGINE

**5-YEAR
WARRANTY**
LIMITED MANUFACTURER'S WARRANTY

GPX 85

Max. Delivery	.85 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.030"
(2 Guns)	0.021"
Max. Hose Length	300'
Engine	Subaru® 126cc
Weight	120 lbs

Includes

- G-10XL Airless Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose



ADVANTAGE™ GPX 130

The GPX 130 is a production sprayer capable of supporting large tips and multiple guns on big jobs. A powerful 169 Cc Subaru® gas engine provides plenty of power for spraying most heavy architectural coatings, block fillers and epoxies.

Recommended for medium to large projects where one or two guns are necessary.

Large Hose Storage Rack
Holds 200' of airless hose

Subaru® 169cc OHC Engine
Overhead cam engines have greater fuel efficiency than overhead valve engines

Durable Cart
With telescoping handle

Four times the electrical power
Positive clutch engagement everytime

ELECTRONIC PRESSURE CONTROL



For precise, consistent pressure in all applications

Heavy-Duty Paint Filter

Exclusive Heavy-Duty Clutch
For increased torque in the system

Static Packings
No cylinder to wear

Lift Handles



GPX 130

Max. Delivery	1.30 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.035"
(2 Guns)	0.025"
Max. Hose Length	300'
Engine	Subaru® 169cc
Weight	159 lbs

Includes

- G-10XL Airless Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose



ADVANTAGE™ GPX 165

The GPX 165 includes a lifetime cylinder warranty to reduce downtime, fully pneumatic tires for easy construction site transporting, and large porting so you can spray high viscosity coatings with multiple guns and long hose lengths.

Recommended for larger projects where multiple guns are necessary.

Subaru® 21cc OHC Engine

Overhead cam engines have greater fuel efficiency than overhead valve engines

Four times the electrical power

For sure clutch engagement everytime

ELECTRONIC PRESSURE CONTROL



For precise, consistent pressure in all applications

Static Packings

No cylinder to wear

Large Hose Storage Rack
Holds 200' of airless hose

Durable Cart
With telescoping handle

Heavy-Duty Paint Filter

Exclusive Heavy-Duty Clutch
For increased torque in the system

Large Pneumatic Tires

S-3 Stainless Steel Airless Gun,
1/4" x 50' Airless Hose

SUBARU GAS ENGINE

**5-YEAR
WARRANTY**
LIMITED MANUFACTURER'S WARRANTY

GPX 165

Max. Delivery	1.65 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.042"
(2 Guns)	0.029"
Max. Hose Length	300'
Engine	Subaru® 211cc
Weight	164 lbs

Includes

- S-3 Airless Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose



ADVANTAGE™ GPX 220

A heavy-duty workhorse with more power than any other sprayer in its class, the GPX 220 is recommended for large interior and exterior coating projects where large tips, multiple guns and long hoses are required.

Recommended for very large projects where multiple guns are necessary.

Subaru® 211cc OHC Engine

Overhead cam engines have greater fuel efficiency than overhead valve engines

Four times the electrical power

For sure clutch engagement everytime

ELECTRONIC PRESSURE CONTROL



2 speed switch optimized for paint and heavy viscosity coatings

Static Packings

No cylinder to wear

Submersed Foot Valve

Allows for ultra-heavy coatings, splatters and knockdown textured finishes

Large Hose Storage Rack
Holds 200' of airless hose

Durable Cart

With telescoping handle

Heavy-Duty Paint Filter


For increased productivity

Exclusive Heavy-Duty Clutch

For increased torque in the system

S-5 Stainless Steel,

Front Feed Airless Gun,
3/8" x 50' Airless Hose

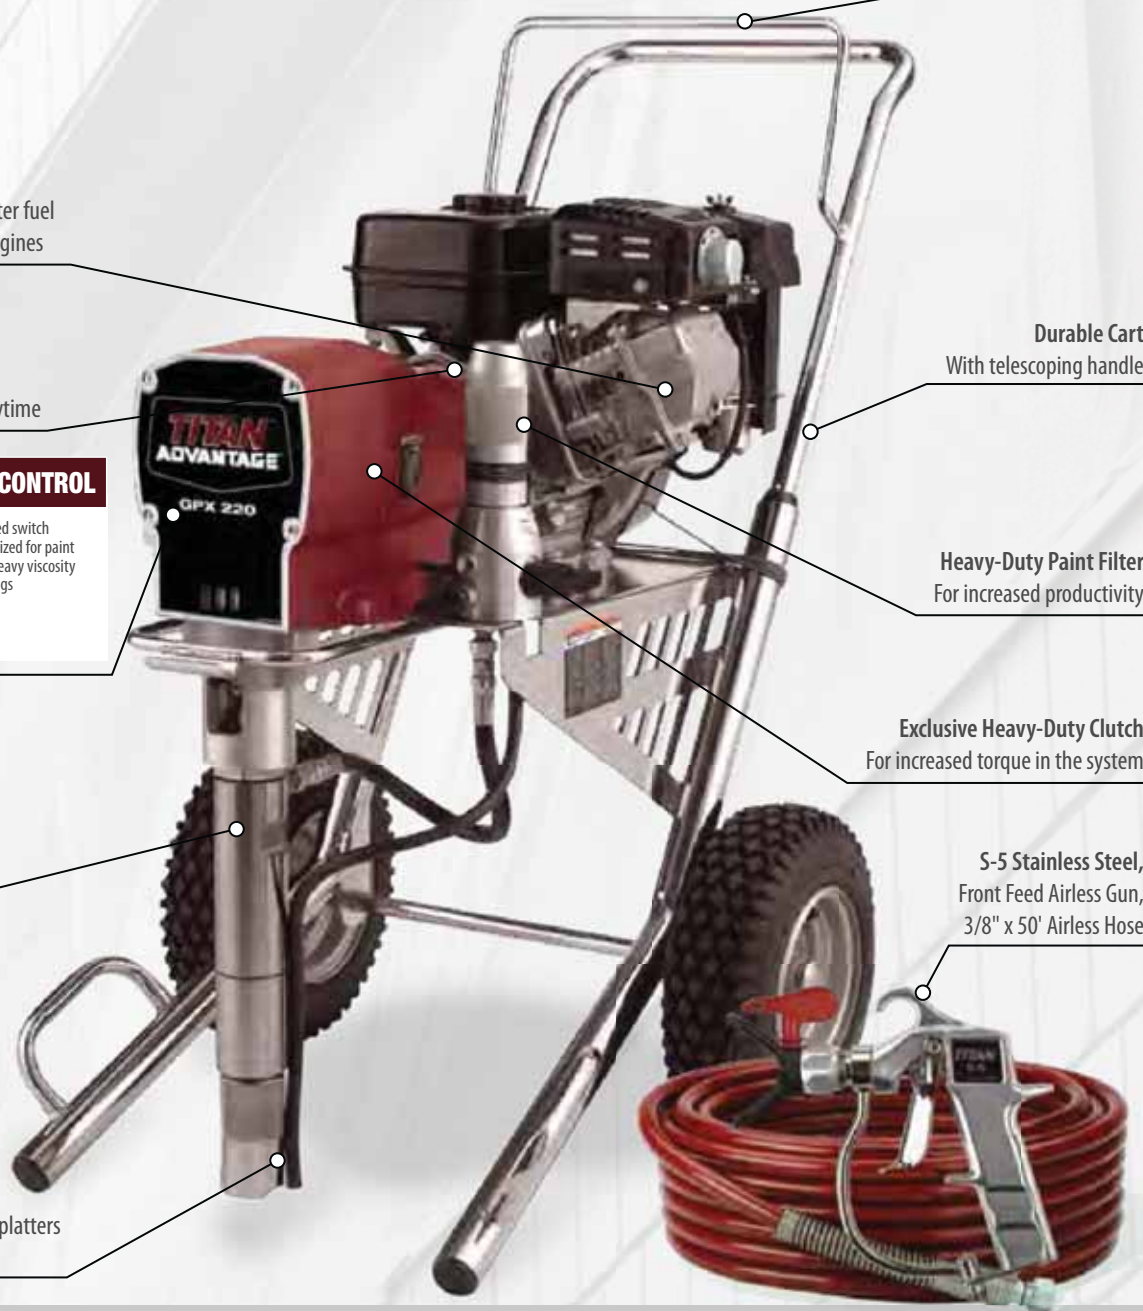

GPX 220

Max. Delivery	2.20 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.049"
(2 Guns)	0.035"
Max. Hose Length	300'
Engine	Subaru® 211cc
Weight	165 lbs

Includes

- S-5 Stainless Steel, Front Feed Airless Gun
- TR¹ Reversible Tip
- 3/8" x 50' Airless Hose
- 6' x 1/4" Whip



TITAN™ POWRTWIN™

Since their introduction almost half a century ago, Titan PowrTwin hydraulic piston sprayers have a well-earned reputation for durability and dependability among serious contractors for large scale residential, commercial and industrial applications and multi-gun usage.

Speeflo® HydraDrive™

- Reliable, smooth, slow-stroking hydraulic drive greatly extends the operational life of the sprayer
- External-hydraulic fluid porting with new, upgraded fittings allows for quick troubleshooting and easy maintenance
- SAE O-Ring fitting and precision rod alignment ensure maximum pump life

Severe Service™ 900 Pump

- Cylinder and piston rod are tempered with a proprietary heat-treating process that increases pump life 150% longer than competitive pumps
- Self-adjusting packings resist over-tightening and help prevent premature wear
- Foot valve removes easily for faster cleaning and easy maintenance
- Reversible inlet and outlet seats have twice the lifespan of ordinary outlet seats. Extra large ball valves ensure efficient pump operation and longer unit life
- Heavy-duty prime/spray valve ensures consistent, increased flow and faster pump priming

These high-performance, heavy-duty paint sprayers use long-stroke, slow-cycling hydraulic piston technology for economical operation and dependable, long-term spraying. The sprayers of choice for serious contractors with large-scale jobs.

ELECTRIC CONVERTIBILITY



Easy, tool-free convertibility from gas-power to electric power for projects where gas engines are not permitted.

SPEEFLO® HYDRADRIVE™



Mechanical valve eliminates expensive, unreliable electronic switching devices.



External hydraulic fluid porting with new upgraded fittings allow for quick trouble shooting and easy maintenance.



SAE O-Ring fitting for precision alignment.



Precision rod alignment for maximum chrome life.

SEVERE SERVICE™ 900 PUMP



Self-adjusting packings prevent premature packing wear due to over-tightening.



New cylinder and piston rod material with proprietary heat treating process increases pump life up to 150% over the competition.



Reversible inlet and outlet seats double the life of standard seats. Extra-large ball valves for efficient pump operation and longer life.



Hand-tite foot valve and cylinder remove easily for quick cleaning and easy maintenance.



POWRTWIN™ 4900 PLUS

Designed and built for contractors who are serious about completing large scale painting projects quickly and profitably. PowrTwin 4900 Plus is ideal for professionals who want the slow-stroking power and long-term durability only Titan hydraulic piston sprayers offer.

- Dependable Subaru® 169 Cc OHC gas-powered engine
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Handles up to three guns
- Precise pressure control from 400 PSI to 3300 PSI, for spraying low viscosity primers all the way up to heavy-bodied finish paints

Recommended for large jobs where up to 3 guns are needed.



POWRTWIN® 4900 PLUS

Max. Delivery, Gas	1.50 GPM
Max. Delivery, Electric	1.10 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.037"
(2 Guns)	0.028"
Engine, Gas	169cc
Motor, Electric	Subaru® 2.0 HP
Weight	130 lbs

Includes

- LX-80^{II} Airless Gun
- TR^I Reversible Tip
- 1/4" x 50' Airless Hose

Uses 506-719 Electric ConventoKit



POWRTWIN™ 6900 PLUS

Designed and built for contractors who are serious about completing large scale painting projects quickly and profitably. PowrTwin 6900 Plus is ideal for professionals who want the slow-stroking power and long-term durability only Titan hydraulic piston sprayers offer.

- Dependable Honda® 160Cc OHV gas-powered engine with Low-Oil Alert
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Handles up to four guns
- Precise pressure control from 400 PSI to 3600 PSI for spraying low viscosity primers all the way up to heavy-bodied finish paints
- Available in gas or electric

Recommended for large jobs where up to 4 guns are needed.

Convenient Pail Hook



SpeeFlo® HydraDrive™ Long 3" piston stroke

Easy access belt guard



Accutrol™ Pressure Control
Accurate from 400–3600 PSI.
No electronics, freeze hazard
or maintenance.

Hydraulic Fill and Dip Stick
Easy aCcess for less mess

Easy Remove Filter
Only 3 turns to remove

Honda® GX160
160cc OHV Engine

Wrap around frame
for extra strength and stability

High Efficiency Cooling Fan
Keeps the hydraulics cooler for longer life

POWRTWIN™ 6900 PLUS

Max. Delivery, Gas	2.25 GPM
Max. Delivery, Electric	1.25 GPM
Max. Operating Pressure	3600 PSI
Max. Tip Size (1 Gun)	0.050"
(2 Guns)	0.033"
Engine, Gas	Honda® 160cc
Motor, Electric	2.0 HP
Weight	139 lbs

Includes

- S-3 Stainless Steel Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose

Uses 506-276A Electric ConvertoKit

POWRTWIN™ 8900 PLUS

A step up for projects that require greater power and output, the PowrTwin 8900 Plus is our best-selling hydraulic piston sprayer, favored by contractors who want to complete large application jobs in record time with high profit margins. Finally a portable sprayer that can handle new construction all the way up to protective coatings.

- Dependable Honda® 200 Cc OHV gas-powered engine with Low-Oil Alert
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Handles up to five guns
- Precise pressure control from 400 PSI to 3600 PSI for spraying low viscosity primers all the way up to heavy bodied coatings, block filler and elastomeric
- Available in gas or electric

A workhorse hydraulic sprayer for contractors working on large projects. Recommended for large jobs where up to 5 guns are needed.

Convenient Pail Hook



SpeeFlo® HydraDrive™ Long 4" piston stroke

Accutrol™ Pressure Control
Accurate from 400–3600 PSI.
No electronics, freeze hazard
or maintenance

Hydraulic Fill and Dip Stick Easy access for less mess

Easy Remove Filter Only 3 turns to remove

Easy Access Belt Guard



Honda® GX200 200cc OHV Engine

High Efficiency Cooling Fan Keeps the hydraulics cooler for longer life

Durable, Chrome-Plated Cart With telescoping handle and extra lift handles

POWRTWIN™ 8900 PLUS

Max. Delivery, Gas	2.50 GPM
Max. Delivery, Electric	1.25 GPM
Max. Operating Pressure	3600 PSI
Max. Tip Size (1 Gun)	0.054"
(2 Guns)	0.038"
Engine, Gas	Honda® 200cc
Motor, Electric	2.0 HP
Weight	155 lbs

Uses 506-276A Electric ConvertoKit

Includes

- S-5 Stainless Steel Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose



POWRTWIN™ 12000 PLUS

For large scale industrial and commercial projects – where maximum GPM output is the difference between profit and loss – serious professionals turn to the PowrTwin 12000 Plus, a super workhorse that can feed any architectural primer or paint coating to as many as SIX guns.

- Dependable Honda® 270 Cc OHV gas-powered engine with Low-Oil Alert
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Precise pressure control from 400 PSI to 3600 PSI for spraying low viscosity primers all the way up to heavy bodied coatings, block filler and elastomers

Recommended for large jobs where up to 5 guns are needed.

Convenient Pail Hook



Easy Remove Filter

Only 3 turns to remove



Easy Access Belt Guard



SpeeFlo® HydraDrive™

Long 4" piston stroke

Accutrol™ Pressure Control

Accurate from 400–3600 PSI.
No electronics, freeze hazard or maintenance.

Hydraulic Fill and Dip Stick

Easy access for less mess

Honda® GX270

270cc OHV Engine

High Efficiency Cooling Fan

Keeps the hydraulics cooler for longer life

Wrap around foot

for extra strength and stability

POWRTWIN™ 12000 PLUS

Max. Delivery, Gas	3.15 GPM
Max. Delivery, Electric	1.25 GPM
Max. Operating Pressure	3600 PSI
Max. Tip Size (1 Gun)	0.059"
(2 Guns)	0.040"
Engine, Gas	Honda® 270cc
Motor, Electric	2.0 HP
Weight	182 lbs

Uses 506-276A Electric ConvertoKit

Includes

- S-5 Stainless Steel Gun
- TR' Reversible Tip
- 1/4" x 50' Airless Hose

DIRECT IMMERSION SPRAYERS

Why Direct Immersion?

Titan SPEEFLO hydraulic airless paint sprayers are the choice of contractors. Our PowrTwin DI Plus models are designed to minimize the distance between the inlet valve and heavy, high-solids coatings, enabling more efficient sprayer operation with less strain on the pump.

DI Plus with EZ-Swing Frame

Direct Immersion design for ultra-heavy coatings.

- Apply texture, architectural primers and finishes with the same sprayer
- Sprays ultra-heavy coatings including joint compound, high solid coatings, block filler, elastomerics and intumescent
- Spray splatter, orange peel and heavy knockdown textures with optional Splatter Nozzle (P/N 765-360)
- Able to siphon ultra-heavy coatings without starving the sprayer
- Pump cleans out faster, with less water or solvent
- Better weight distribution, lower center of gravity and large pneumatic tires for ease of transportation, even in the most severe job-site conditions
- Converts from gas power to electric power in seconds — without tools



POWRTWIN™ 6900 DI PLUS

Large scale projects need large scale, direct immersion sprayers – the kind of sprayers only Titan can offer. Slow-stroking hydraulic technology coupled with state-of-the-art engineering and maximum engine power means consistent, dependable performance and a high profit margin. This is a serious sprayer for serious contractors.


- Dependable Honda® 160Cc OHV gas-powered engine with Low-Oil Alert
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Handles up to four guns
- Precise pressure control from 400 PSI to 3600 PSI for spraying low viscosity primers all the way up to heavy-bodied finish paints
- Available in gas or electric

SpeeFlo® HydraDrive™
Long 3" piston stroke

Easy Remove Filter
Only 3 turns to remove

Honda®GX160
160cc OHV Engine

Accutrol™ Pressure Control
Accurate from 400–3600 PSI.
No electronics, freeze hazard
or maintenance

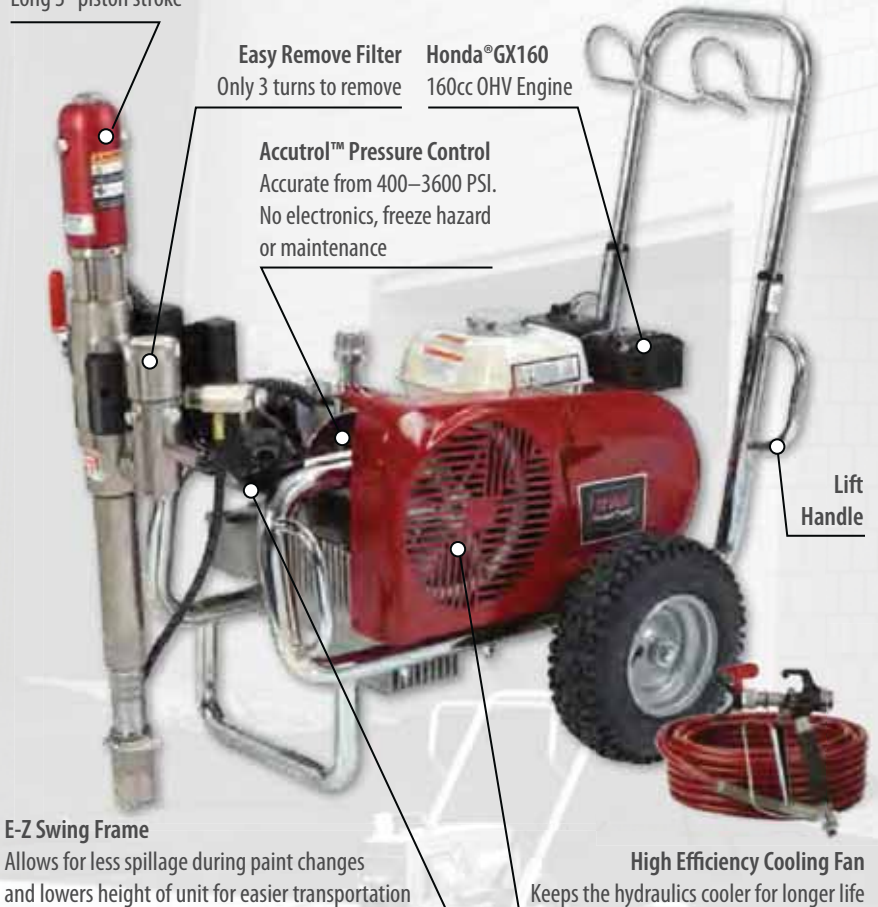

E-Z Swing Frame

Allows for less spillage during paint changes
and lowers height of unit for easier transportation

High Efficiency Cooling Fan
Keeps the hydraulics cooler for longer life

POWRTWIN™ 6900 DI PLUS

Max. Del. Gas	2.25 GPM
Max. Del. Electric	1.25 GPM
Max. Oper. Pressure	3600 PSI
Max. Tip Size (1 Gun)	0.049"
(2 Guns)	0.033"
Engine, Gas	Honda® 160cc
Motor, Electric	2.0 HP
Weight	139 lbs

Includes

- S-3 Stainless Steel Gun
- TR¹ Reversible Tip
- 3/8" x 50' Airless Hose with a 1/4" whip

Uses 506-279 Electric Converto Kit

POWRTWIN™ 12000 DI PLUS

Lowest cost and easiest to transport roofing sprayer on the market ever. Ideal for cool roof applications.

- Dependable Honda® 270Cc OHV gas-powered engine with Low-Oil Alert
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Precise pressure control from 400 PSI to 3600 PSI for spraying low viscosity primers all the way up to heavy bodied coatings, block filler and elastomerics

SpeeFlo® HydraDrive™
Long 4" piston stroke

Easy Remove Filter
Only 3 turns to remove

Durable, Chrome-Plated Cart
With telescoping handle
and extra lift handles

**HIGH CAPACITY HYDRAULIC
FLUID CARTRIDGE FILTER**



Keeps hydraulic system clean and easy to maintain

Accutrol™ Pressure Control
Accurate from 400–3600 PSI.
No electronics, freeze hazard or maintenance

Lift Handle
For easy transport

Honda® GX270
270cc OHV Engine

E-Z Swing Frame
Allows for less spillage during paint changes and lowers height of unit for easier transportation

Large Pneumatic Tires
For ease of transport

High Efficiency Cooling Fan
Keeps the hydraulics cooler for longer life

POWRTWIN™ 12000 DI PLUS

Max. Delivery, Gas	3.15 GPM
Max. Delivery, Electric	1.25 GPM
Max. Operating Pressure	3600 PSI
Max. Tip Size (1 Gun)	0.059"
(2 Guns)	0.040"
Engine, Gas	Honda® 270cc
Motor, Electric	2.0 HP
Weight	188 lbs

Uses 506-276A Electric Converto Kit

Includes

- S-5 Stainless Steel Gun
- TR¹ Reversible Tip
- 1/4" x 50' Airless Hose



TITAN™ HYDRA™

New construction, bridges, water tanks, roofing and other giant scale projects require the kind of hydraulic piston power only a Titan Hydra can deliver. It is the ultimate sprayer for any commercial or industrial job where maximum power and pressure are required and dependability is critical.

HYDRA™ PRO IV

The workhorse hydraulic sprayer for serious applications. This high production sprayer pumps all architectural coatings, drywall mud, epoxies, mastics and elastomeric roof coatings.



Honda® 270cc OHV Engine

Ultra Slow
Stroking Hydraulics
For unmatched life

HYDRA™ PRO IV

Max. Delivery	2.5 GPM
Max. Operating Pressure	3300 PSI
Max. Tip Size (1 Gun)	0.050"
(2 Guns)	0.035"
(3 Guns)	0.029"
(4 Guns)	0.025"
(5 Guns)	0.021"
Engine	Honda® 270cc
Weight	350 lbs



HYDRA™ M 4000

The all-around powerhouse hydraulic sprayer for any application. This solid, ultra-slow-stroking, three gallon per minute hydraulic system delivers the heaviest, most viscous coatings to any interior and exterior surface with maximum efficiency and minimal downtime.

- Extra pressure for hard to atomize coatings or long hoses
- Available with siphon hose or 55 gallon direct immersion remote
- SP model available for hard to apply and specialty foundation coatings

Honda® 390cc OHV Engine
With electric start

Ultra Slow
Stroking Hydraulics
For unmatched life

Hydra Remote
Direct immersion remote
for 55 gallon drums



HYDRA™ M 4000

Max. Delivery	3.3 GPM
Max. Operating Pressure	4000 PSI
Max. Tip Size (1 Gun)	0.060"
(2 Guns)	0.040"
(3 Guns)	0.035"
(4 Guns)	0.029"
(5 Guns)	0.025"
Engine, Gas	Honda® 390cc
Weight	370 lbs



HYDRA™ M 2000

The ultimate powerhouse hydraulic sprayer designed to apply high-viscosity fibered and bituminous coatings at the astonishing rate of six gallons per minute. This is the high performance hydraulic sprayer that contractors purchase and use for a lifetime.

- Extra output for extra large tips and long hoses
- Available with siphon hose or 55-gallon direct immersion remote

Honda® 390cc OHV Engine
With electric start

Ultra Slow
Stroking Hydraulics
For unmatched life

Hydra Remote
Direct immersion remote
for 55 gallon drums



HYDRA™ M 2000

Max. Delivery	6.0 GPM
Max. Operating Pressure	2000 PSI
Max. Tip Size (1 Gun)	0.075"
Max. Tip Size (2 Gun)	0.053"
Engine, Gas	Honda® 390cc
Weight	385 lbs



SPECIAL COATINGS SPECIFICATIONS

	GPX 33	GPX 85	GPX 130	GPX165/ 220	PT4900/ 6900	PT8900/ 12000	PT6900DI/ 12000DI	Hydra Pro™ IV	Hydra™ M 4000	Hydra™ M 2000
Protective Coatings										
Acrylic-Waterborne	•	•	•	•	•	•	•	•	•	
Acrylic-Solventborne	•	•	•	•	•	•	•	•	•	
Alkyd	•	•	•	•	•	•	•	•	•	
Epoxy Finishes		•	•	•	•	•	•	•	•	
Epoxy Mastics		•	•	•	•	•	•	•	•	
Polyester		•	•	•	•	•	•	•	•	
Polyurethane		•	•	•	•	•	•	•	•	
Phenolic		•	•	•	•	•	•	•	•	
Vinyl		•	•	•	•	•	•	•	•	
Coal Tar									•	•
Zinc Rich – Organic									•	•
Solvent Based		•	•	•	•	•	•	•	•	•
Architectural Coatings										
Latex	•	•	•	•	•	•	•	•	•	
Enamel	•	•	•	•	•	•	•	•	•	
Block Filler			•	•	•	•	•	•	•	
Elastomerics			•	•	•	•	•	•	•	
Industrial Finishes										
Lacquers	•	•	•	•	•	•	•	•	•	•
Stains	•	•	•	•	•	•	•	•	•	•
Sealers	•	•	•	•	•	•	•	•	•	•
Varnishes	•	•	•	•	•	•	•	•	•	•
Polyurethanes	•	•	•	•	•	•	•	•	•	•
Roof Coatings / Waterproofing										
Asphalt Emulsion										•
Cutback Asphalts										•
Fibrated Aluminum										•
Elastomerics			•	•	•	•	•	•	•	•
Water Based		•	•	•	•	•	•	•	•	•
Polyurethane				•	•	•	•	•	•	
Mastics - Sprayable				•	•	•	•	•	•	
Bituminous Coatings										•
Sealants - Sprayable				•	•	•	•		•	
Texture Coatings:										
Smooth			•	•	•	•	•	•	•	•
Cool Roof				•	•	•	•	•	•	

*These are general guidelines. Call Titan Technical Support to confirm individual coatings if you have questions.

GAS AIRLESS ACCESSORIES

Guns

P/N	Description	Hose Fitting	Max PSI Rating	Feature
0550040	LX-80 [®] , 2-Finger	1/4" Swivel	3,600	Aluminum Fluid Passage, Filter in Handle
0296236	G-10XL, 2-Finger	1/4" Swivel	3,600	Aluminum Fluid Passage, Filter in Handle
0550060	S-3 with TR ¹ Tip	1/4" Swivel	3,900	Stainless Steel Fluid Passage, Filter in Handle
0550070	S-5 with TR ¹ Tip	1/4" Swivel	5,000	Front Feed, Stainless Steel Fluid Passage

No Build Tip Guard

P/N	Description
0289228	5,000 PSI Tip Guard

Splatter Nozzle

P/N	Description
765-360	Splatter Nozzle Accessory

Aluminium Gun Extensions

P/N	Description	Fitting	Max PSI Rating
651-070	6" Gun Extension	7/8" G-Thread	3,600
651-071	12" Gun Extension	7/8" G-Thread	3,600
651-072	18" Gun Extension	7/8" G-Thread	3,600
651-073	24" Gun Extension	7/8" G-Thread	3,600

TR¹ Airless Reversible Tips - Max Pressure Rating: 5,000 PSI

695-XXX

IN	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055
4-6		209	211	213	215	217														
6-8			311	313	315	317														
8-10			411	413	415	417														
10-12				513	515	517	519	521		525										
12-14											627									
Flow GPM	0.09	0.12	0.18	0.24	0.31	0.39	0.47			0.67	0.78									

SC-6+ Airless Reversible Tips - Max Pressure Rating: 5,000 PSI

662-XXX

IN	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055
2-4	107	109	111	113	115	117														
4-6	207	209	211	213	215	217	219	221	223	225	227	229	231	233	235					
6-8	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335					
8-10	407	409	411	413	415	417	419	421	423	425	427	429	431	433	435	439	443	445	451	455
10-12		509	511	513	515	517	519	521	523	525	527	529	531	533	535	539	543	545	551	555
12-14		609	611	613	615	617	619	621	623	625	627	629	631	633	635	639	643	645	651	655
14-16							719	721					731		735					
16-18								821					831							
Flow GPM	0.05	0.09	0.12	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.64	1.99	2.18	2.80	3.26

TR² Airless Reversible Tips - Max Pressure Rating: 5,000 PSI

692-XXX

Inches	MM	.011	.013	.015	.017	.019	.021	.023	.027	.031	.035
2-4	51 - 102										
4-6	102 - 152										
6-8	152 - 203	311	313								
8-10	203 - 254			415	417						
10-12	254 - 305			515	517	519	521				535
12-14	305 - 356								627		635
14-16	356 - 406										
16-18	406 - 457									831	
18-20	457 - 508										
20-22	508 - 559										
22-24	559 - 610										
24-26	610 - 660									1223	1231
Flow (GPM)	---	0.12	0.18	0.24	0.31	0.39	0.47	0.57	0.78	1.03	1.32



Premium










Value










Versatile

SPECIFICATIONS

							
	ADVANTAGE™ GPX 33	ADVANTAGE™ GPX 85	ADVANTAGE™ GPX 130	ADVANTAGE™ GPX 165	ADVANTAGE™ GPX 220	PowrTwin™ 4900 Plus	PowrTwin™ 6900 Plus
Part Number Gas w/Heavy Duty Bypass Valve Electric Flexible Siphon	0290001 — — —	0509036 — — —	0509038 — — —	0509039 — — —	0509023 — — —	0290012 — — —	0290013 0290028 —
Engine	37.7cc	Subaru 126cc	Subaru 169cc	Subaru 211cc	Subaru 211cc	Subaru 169cc	Honda GX160 160cc
Optional Electric Motor	—	—	—	—	—	2 hp Exl-DC (Part #506-719)	2 hp Exl-DC (Part #506-276A)
Gun Included	LX-50	G-10XL	S-3	S-3	S-5	LX-80	S-3
Tips Included	517	517	517	517	517	517	517
Hose Included		1/4" x 50'	1/4" x 50'	1/4" x 50'	1/4" x 50'	1/4" x 50'	1/4" x 50'
Max. Output: (Gas) (Electric)	0.33 GPM —	0.85 GPM —	1.30 GPM —	1.65 GPM —	2.20 GPM —	1.50 GPM 1.10 GPM	2.25 GPM 1.25 GPM
Max. Operating Pressure	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3600 PSI
Max. Tip Size (Gas): 1 Gun 2-Guns 3 Guns 4 Guns 5 Guns 6 Guns	0.017" — — — — —	0.030" 0.021" — — — —	0.035" 0.025" 0.017" — — —	0.042" 0.029" 0.023" 0.017" — —	0.049" 0.035" 0.027" 0.023" — —	0.037" 0.028" 0.022" — — —	0.050" 0.033" 0.023" 0.019" — —
Max. Tip Size (Elec.): 1 Gun 2-Guns 3 Guns 4 Guns	— — — —	— — — —	— — — —	— — — —	— — — —	0.031" 0.028" 0.022" —	0.036" 0.033" 0.023" 0.019"
Max Hose Length	100'	300'	300'	300'	300'	300'	400'
Paint Outlet: Filter Element Filter Area	—	50 mesh 18 in ²	50 mesh 18 in ²	50 mesh 18 in ²	50 mesh 18 in ²	50 mesh 18 in ²	50 mesh 18 in ²
Weight (Gas)	—	120 lbs (54.4 KG)	159 lbs (72.1 KG)	164 lbs (74.3 KG)	165 lbs (74.8 KG)	130 lbs (59 KG)	139 lbs (63.1 KG)
Weight (Electric)	—	—	—	—	—	139 lbs (63.1 KG)	148 lbs (67.1 KG)
Dimensions (LxWxH)	—	27" x 30" x 24"	27" x 30" x 24"	27" x 30" x 24"	27" x 30" x 24"	37" x 27" x 35"	37" x 27" x 35"
Common Applications	Residential remodeling, Decks, Fences, Remote locations	New construction, residential remodeling, remote location	New construction, residential remodeling, remote location	New construction, residential remodeling, remote location, elastomerics, block filler	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	New construction, residential remodeling, remote location	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, some roof coatings

FOR YOUR TOUGHEST SPRAYING APPLICATION

 PowrTwin™ 8900 Plus	 PowrTwin™ 12000 Plus	 PowrTwin™ 6900 DI Plus	 PowrTwin™ 12000 DI Plus	 Hydra™ Pro IV	 Hydra™ M 4000	 Hydra™ M 2000
0290018 — 0290027 —	0290016 — — —	0290021 — 0290029 —	0290023 — — —	433-820 — — —	433-801 433-800 — 433-802 (55 gal)	— 433-860 — 433-861 (55 gal)
Honda GX200 200cc	Honda GX270 270cc	Honda GX160 160cc	Honda GX270 270cc	Honda GX270 270cc	Honda GX390 390cc with electric start	Honda GX390 390cc with electric start
2 hp Exl-DC (Part #506-276A)	2 hp Exl-DC (Part #506-276A)	2 hp Exl-DC (Part #506-279)	2 hp Exl-DC (Part #506-279)	—	—	—
S-5	S-5	S-5	S-5	—	—	—
517	517	517	517	—	—	—
1/4" x 50'	1/4" x 50'	3/8" x 50'	3/8" x 50'	—	—	—
2.50 GPM 1.25 GPM	3.15 GPM 1.25 GPM	2.25 GPM 1.25 GPM	3.15 GPM 1.25 GPM	2.5 GPM —	3.3 GPM —	6.0 GPM —
3600 PSI	3600 PSI	3600 PSI	3600 PSI	3300 PSI	4000 PSI	2000 PSI
0.054" 0.038" 0.032" 0.028" 0.024" —	0.059" 0.040" 0.034" 0.030" 0.026" 0.024"	0.050" 0.033" 0.023" 0.019" — —	0.059" 0.040" 0.034" 0.030" 0.026" 0.024"	0.050" 0.035" 0.029" 0.025" 0.021" —	0.060" 0.040" 0.035" 0.029" 0.025" —	0.075" 0.053" — — — —
0.036" 0.033" 0.023" 0.019"	0.036" 0.033" 0.023" 0.019"	0.036" 0.033" 0.023" 0.019"	0.036" 0.033" 0.023" 0.019"	— — — —	— — — —	— — — —
400'	400'	400'	400'	300'	400'	300'
50 mesh 18 in ²	50 mesh 18 in ²	5 mesh 18 in ²	5 mesh 18 in ²	50 mesh 18 in ²	50 mesh 18 in ²	— —
155 lbs (70.3 KG)	182 lbs (82.6 KG)	149 lbs (67.6 KG)	188 lbs (85.3 KG)	350 lbs (158.8 KG)	360 lbs (163.3 KG)	385 lbs (174.6 KG)
164 lbs (74.4 KG)	188 lbs (85.3 KG)	165 lbs (74.8 KG)	192 lbs (87.1 KG)	—	—	—
43" x 27" x 35"	46" x 27" x 35"	43" x 27" x 35"	46" x 27" x 35"	34.5" x 24.5" x 37"	36.5" x 24.5" x 37"	37.5" x 24.5" x 37"
New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	New construction, residential remodeling, remote location, elastomerics, block filler, waterproofing, foundation coating, some roof coatings	Waterproofing, foundation coating, roof coatings	Emulsions, cutback asphalts, bituminous, roof coatings



THE BEST & LONGEST WARRANTY IN THE INDUSTRY

Not only do we deliver high quality sprayers, we are proud to back them up with the best and longest warranty in the industry.

Titan sprayers are built to last. We are so confident that our sprayers will hold up to the most difficult jobs that we offer the best and longest warranty in the industry.

4 YEAR MANUFACTURER'S DEFECT

We pledge that our sprayers are free from defects in materials and workmanship. This excludes normal wear items and consumables such as filters, piston, packings, tips, etc.

LIFETIME DURALIFE BRUSHLESS HE AND PMDC BRUSHLESS MOTOR WARRANTY

If the motor fails for any reason (including wear) for as long as you own the sprayer, we will replace the motor at no cost to you.

LIMITED LIFETIME DCX MOTOR WARRANTY

If the motor fails from normal usage for as long as you own the sprayer, we will replace the motor at no cost to you.

GAS ENGINE WARRANTY

5 year Subaru®, 3 year Honda® and 2 years all others.

2 YEAR TURBINE WARRANTY

LIFETIME DRIVE TRAIN WARRANTY

If the drive train fails from normal usage for as long as you own the sprayer, we will replace the drive train at no cost to you.

35-DAY SATISFACTION GUARANTEE

If for any reason the sprayer does not perform up to your expectations within 35 days, the sprayer can be exchanged for the identical model or full credit towards the purchase of a Titan sprayer of larger size and value.

EXPRESS PARTS PROGRAM

- Over 900 Authorized Service Centers nationwide
- The most common repair parts are guaranteed to be in stock 100% of the time
- If for any reason your preferred Authorized Service Center is out of stock, free 2nd day air is available when ordered by 3:00 pm (EST)

For more information about the industry's leading warranty, please call the Titan® Technical Service Department at 1-800-526-5362.

WEARGUARD™ CONVENIENCE PROGRAM

Get up to 80% off a spare fluid section or choose to get a free repacking kit

Titan™ 400 **\$109^{95*}**

Small **\$149^{95*}**

Impact: 440, 540, 640

Impact Models Include Pusher Valve, Prime Spray Valve, and Manifold Filter Assembly

Medium **\$199^{95*}**

Advantage: 1100 Impact: 740, 840, 1140

GPX: 85, 130, 165 PowrLiner: 2850

Large **\$299^{95*}**

PowrTwin: 4900 Plus, 6900 Plus, 8900 Plus, 12000 Plus, 6900 Plus DI, 12000 Plus DI PowrLiner: 4950, 6950, 8950

PowrTex: 1200SF GPX: 220

Extra Large **\$599^{95*}**

PowrCoat: 730, 745, 940, 960, 975 Hydra: Pro IV

*Tax not included

TITAN™

TITAN
POWERHOUSE
THE PROFESSIONAL'S EDGE

Plug into TitanPowerHouse.com

All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice.

Visit us on the web at: www.titantooll.com
Call Tech Services at 1-800-526-5362 for complete warranty information.

Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.

Titan Tool, Inc.

1770 Fernbrook Lane
Minneapolis, MN 55447
1-800-526-5362
Fax 1-800-528-4826