



GH™ Big Rig™ Sprayers

Large Gas Hydraulic Sprayers



PROVEN QUALITY. LEADING TECHNOLOGY.


There is no other sprayer like a GRACO.

Welcome to a whole new world of coating application possibilities.

Graco manufactures the most extensive and highest quality professional line of coating solutions in the market. This informational guide is designed to help you select the right solutions to your coating needs.

According to Frost & Sullivan, "U.S. Painting Contractors overwhelmingly rate Graco as the best overall brand of spray equipment and is considered the *'Overall Best'* brand among all paint-related products." When it comes to making a choice, Graco is preferred 7 to 1 over the nearest competitive brand.

2008 Overall Best Brand of Spray Equipment

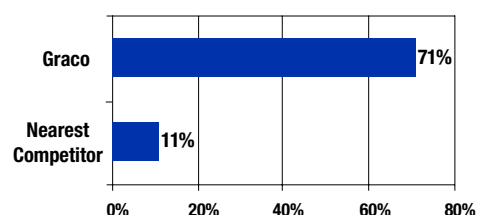

Frost & Sullivan, 2008 Paint Contractors Choice Award for Overall Best Brands

Most importantly, when choosing Graco, you can be assured that you are choosing the highest quality product in the industry. You can take pride in the fact that Graco products are designed, manufactured, and assembled right here in the United States of America, with contractor preferred Honda® engines.

We do!



The G4 Difference... We Build It. We Back It. *Period.*



QUALITY | PERFORMANCE | WARRANTY | PRODUCTIVITY

Only Graco delivers the industry's first choice for gas airless sprayers, backed by a solid reputation for proven quality, maximum performance, reliable warranty coverage and unmatched on-the-job productivity. Graco sprayers are designed to exceed the professional painting contractor's standards for quality and performance. Graco is the name to turn to today and as your business grows.

PROVEN QUALITY

Precision design, 100% factory-tested and field-proven.

Cutting-edge technology keeps Graco sprayers up and running and on the job for years.

MAXIMUM PERFORMANCE

Higher output with superior control ensures highest quality finish for every job.

Rely on any of these high performance sprayers to deliver the results you expect from a Graco.

INDUSTRY LEADING WARRANTY

Every Graco gas sprayer is backed by our full warranty coverage and more than 80 years of proven commitment to the professional contractor. Sprayers so reliable you may never need to use the warranty!

UNMATCHED PRODUCTIVITY

Exclusive Endurance Pumps deliver long life, reliable performance and consistent spraying. The Endurance Advantage Program eliminates downtime by keeping a spare pump on hand for a quick change-out on the job.



GMAX™ II 7900 Roof Rig

GH 833



GMAX II 7900 Roof Rig

DESCRIPTION
GMAX II 7900 Roof Rig

PART #:
16W987

SPECIFICATIONS:
MAX TIP SIZE: .048–1 Gun
.035–2 Guns
.027–3 Guns
.023–4 Guns

MAX GPM (LPM): 2.2 (8.3)
MAX PSI (BAR): 3300 (227)
HONDA ENGINE: 200 cc (6.5 HP)

INCLUDES:
• Heavy-Duty Gun
• LTX527, LTX635 SwitchTips and Guard
• 20 in (50 cm) Fixed Heavy-Duty Tip Extension
• 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless Hose
• 1/4 in x 3 ft (6.4 mm x .9 m) BlueMax II Whip Hose

The **GMAX II 7900 Roof Rig** is the industry standard for professional contractors who spray a full range of coatings on residential, commercial and industrial jobs. Powered by Honda® engines, this portable rig will go anywhere the job demands.

Honda Power

- ▶ Delivers maximum performance
- ▶ Contractor preferred engine with Oil Alert

SmartControl™ Pressure Control

- ▶ Advanced microprocessor control delivers the most consistent spray fan at all spraying pressures

Advantage Drive™ System

- ▶ Time-tested drive system provides peace of mind
- ▶ Hardened helical gears are quiet running
- ▶ Lifetime guarantee

Easy Out™ Pump Filter

- ▶ Filtering reduces tip clogs and ensures a quality finish
- ▶ Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- ▶ Filter removes with the cap for less mess



The **GH 833** is the preferred choice for high production professional contractors who spray the wide range of materials. This jobsite-proven workhorse is the answer when you demand ruggedness, performance and value.

Honda Engine with Electric Start* (*ES models only)

- ▶ 390 cc (13 HP) engine with integrated fuel tank to deliver maximum performance
- ▶ Contractor preferred engine with Oil Alert
- ▶ Back-up Pull Start
- ▶ High-capacity, 12 Volt 18 Amp Charging System*

Heavy-Duty Graco Hydraulic System

- ▶ Faster, more responsive changeover
- ▶ O-ring sealed to eliminate leaks
- ▶ High-precision pressure control
- ▶ No hydraulic reset button needed
- ▶ Durable hydraulic lines for long life

Bare Electric Start model shown



Flow-Through Filter System

- ▶ Inside/out design eliminates clogged filters
- ▶ Eliminates tip clogs

Heavy-Duty Frame

- ▶ Easy-roll tubed pneumatic tires
- ▶ Enamel painted steel tubing – corrosion protection
- ▶ Multi-function design converts to skid mount in seconds

Heavy-Duty Cooling System

- ▶ Large 4 gallon hydraulic reservoir
- ▶ Return line hydraulic filter extends life
- ▶ No special hydraulic fluid needed
- ▶ Proven cooler and blower system
- ▶ Easy to use drain plug

Exclusive MaxLife Endurance Pump

- ▶ Proven design and performance
- ▶ Only 16 cycles per gallon
- ▶ Exclusive MaxLife rod and sleeve delivers unmatched durability and life – *Graco's best*
- ▶ Exclusive QuikChange Pump System and QuikAccess Intake Valve eliminates downtime

GH 833

DESCRIPTION
GH 833 Bare 249318
GH 833 Complete 249617
GH 833es Bare Electric Start 16U287
GH 833es Complete Electric Start 16U288
GH 833 OEM 249767
(Hydraulic Engine and Displacement Pump Only)

SPECIFICATIONS:
MAX TIP SIZE: .065–1 Gun
.046–2 Guns
.037–3 Guns
.032–4 Guns
.029–5 Guns
.026–6 Guns

MAX GPM (LPM): 4.0 (15.1)
MAX PSI (BAR): 4000 (276)
HONDA ENGINE: 390 cc (13.0 HP)

COMPLETE SPRAYER INCLUDES:
• Silver Plus Gun
• RAC X 517, RAC X 655 SwitchTips and Guard
• 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II HP Airless Hose
• 1/4 in x 3 ft (6.4 mm x .9 m) BlueMax II Whip Hose

Additional Features:

- ▶ Lockable pressure control knob
- ▶ Grounding wire for safety with solvent materials
- ▶ Huge 1.5 inch diameter siphon hose
- ▶ Oversized 1 inch porting on displacement pump



Direct Immersion Kit allows ultimate flexibility with tough-to-spray materials. (Part #287843)



The GMAX II 7900 Roof Rig sprayer features Graco's extreme-duty MaxLife Pump

- ▶ Lasts 6X longer between repacks
- ▶ Features exclusive hardened MaxLife sleeve and rod
- ▶ Oversized clearances ensure minimal pressure drop

Endurance Pump

- ▶ Long-life V-Max Blue™ packings, Chromex™ rod and hardened Stainless Steel sleeve
- ▶ Exclusive MaxLife™ rod and sleeve delivers unmatched durability and life – *Graco's best*
- ▶ QuikAccess™ intake valve requires only a hammer to access the intake ball to easily clean or clear debris

Introducing the all new **BIG RIG SPRAYERS**

GH 733/GH 933/GH 1017/GH 2570/ GH 5040



The most **POWERFUL** hydraulic sprayer in the industry!



GH 933

DESCRIPTION
 GH 933 Bare 16U281
 GH 933 Complete 16U282
 GH 933 Bare Electric Start 16U285
 GH 933es Complete Electric Start 16U286

SPECIFICATIONS:
 MAX TIP SIZE: .053
 MAX GPM (LPM): 2.5 (9.5)
 MAX PSI (BAR): 7250 (500)
 HONDA ENGINE: 390 cc (13.0 HP)

COMPLETE SPRAYER INCLUDES:
 • XTR 704 Gun
 • XHD 519 SwitchTip and Guard
 • 3/8 in x 50 ft (9.5 mm x 15 m) Xtreme-Duty Airless Hose
 • 1/4 in x 6 ft (6.4 mm x 1.8 m) Xtreme-Duty Whip Hose

GH 933es Hi Flo Big Rig

Optimized for Silicon and other Heavy Bodied Materials

Equipped with Graco's proven Xtreme® pump lower with durable Tuff-Stack™ packings, this pump features oversized outlets and a filter-less design for maximum flow and performance.

DESCRIPTION
 GH 933es Hi Flo Bare 17B484
 GH 933es Hi Flo Complete 17B485

COMPLETE SPRAYER INCLUDES:
 • XHF Gun
 • XHD 429 SwitchTip and Guard
 • 3/8 in x 50 ft (9.5 mm x 15 m) Xtreme-Duty Airless Hose
 • 1/4 in x 6 ft (6.4 mm x 1.8 m) Xtreme-Duty Whip Hose

Heavy-Duty Graco Hydraulic System


- ▶ Faster, more responsive changeover
- ▶ O-ring sealed to eliminate leaks
- ▶ High-precision pressure control
- ▶ No hydraulic reset button needed
- ▶ Durable hydraulic lines for long life

Heavy-Duty Cooling System

- ▶ Large 4 gallon hydraulic reservoir
- ▶ Return line hydraulic filter extends life
- ▶ No special hydraulic fluid needed
- ▶ Proven cooler and blower system
- ▶ Easy to use drain plug

Exclusive Xtreme™ Pump

- ▶ QuikChange pump section
- ▶ Time tested durability and performance
- ▶ Long life XtremeSeal™ and leather packings
- ▶ Heavy-duty piston rod for long life
- ▶ QuikAccess intake valve removes easily for fast repairs

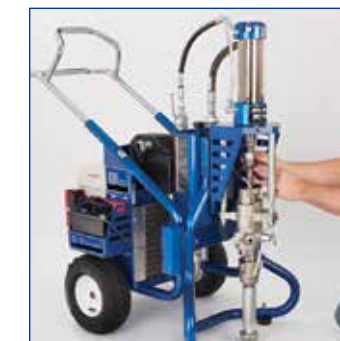

Interchangeable pumps allow maximum versatility for all applications.

Additional Features

- ▶ Lockable pressure control knob
- ▶ Grounding wire for safety with solvent materials
- ▶ Large diameter siphon hose



For 30 years, contractors have turned to the GH line of gas hydraulic sprayers when they needed maximum performance and unmatched versatility. The tradition continues with the all new line of GH Big Rig sprayers. Equipped with exclusive QuikChange™ Lowers, each Big Rig sprayer can easily be customized for each coating, eliminating the need to purchase additional rigs. Whether you require high pressure for long hose runs and hard-to-atomize materials, or high flow rates for heavier coverage, turn to the GH Big Rig sprayers to get the job done!

Honda Engine with Electric Start* (*ES models only)

- ▶ 390 cc (13 HP) engine with integrated fuel tank to deliver maximum performance
- ▶ Contractor preferred engine with Oil Alert
- ▶ Back-up Pull Start
- ▶ High-capacity, 12 Volt 18 Amp Charging System*



Rugged, Heavy-Duty Steel Frame

- ▶ Welded, heavy-gauge steel construction
- ▶ Integrated, fully-balance lift points
- ▶ Easy-roll tubed pneumatic tires
- ▶ Enamel painted steel tubing – corrosion protection
- ▶ Multi-function design converts to skid mount in *seconds* – easily converts to secure skid mount by moving handle to lower frame holes



Perfect for trucks and trailers!

BIG RIG MATERIAL APPLICATION CHART

SPRAYABLE COATINGS

- Architectural
- Protective
- Roofing, Waterproofing, Fireproofing

GRACO SPRAYER

	Latex Paints	Primers	Block Fillers	Enamel	Elastomerics	Acrylic: Water / Solvent	Epoxy: Finishes / Mastics	Polyester	Coal Tar	Polyurethane	Asphalt Emulsion: Fibered / Non-fibered	Mastics - Adhesive Type	Waterproofing / Above and Below Grade	Contact Cement	Asphalt Cut-back: Fibered / Non-fibered	Texture: Smooth and Fine	Burmastics	MonoForm	Aluminum Emulsion: Fibered / Non-fibered	Elastomeric Acrylic	Emulsion Primer	Silicon	Intumescent
GMAX II 7900 RR	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 733	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 833	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 933	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 1017	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 2570	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GH 5040	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Note: Materials and temperatures may dictate the hose length you can use.

BIG 250 SAVINGS

**Ready-to-Spray
BIG 250
Systems
Designed
FOR YOU
by Graco!**

Decide which system fits your application needs with these **7 Ready-to-Spray Systems** from Graco. Configured with 250 feet of pressure-rated hose, gun, tip extensions, and all the fittings you will need, these systems offer ultimate convenience and value. Whether you require high-pressure, maximum flow, electric start, or even the ability to swap pumps with available QuikChange Loweres, we have a System for you!

YOU DECIDE!

- 16U776 – GH 2570Es Big 250 System**
INCLUDES: GH 2570Es with Electric Start, 250 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, Gun Swivel, Heavy-Duty Gun, 30 in Tip Extension, 180° Tip Swivel, RAC X™ 519, 531 Tips and all fittings
- 16U778 – GH 733Es Big 250 System**
INCLUDES: GH 733Es with Electric Start, 250 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, Gun Swivel, Heavy-Duty Gun, 30 in Tip Extension, 180° Tip Swivel, RAC X 519, 531 Tips and all fittings
- 16U780 – GH 833 Big 250 System**
INCLUDES: GH 833, 250 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, Gun Swivel, Heavy-Duty Gun, 30 in Tip Extension, 180° Tip Swivel, RAC X 519, 531 Tips and all fittings
- 16U781 – GH 833Es Big 250 System**
INCLUDES: GH 833Es with Electric Start, 250 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, Gun Swivel, Heavy-Duty Gun, 30 in Tip Extension, 180° Tip Swivel, RAC X 519, 531 Tips and all fittings
- 16U782 – GH 5040Es Big 250 System**
INCLUDES: GH 5040Es with Electric Start, 250 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, Gun Swivel, Flex Plus Gun, 18 in Tip Extension, 180° Tip Swivel, RAC X 517, 531 Tips and all fittings
- 16U783 – GH 933 Big 250 System**
INCLUDES: GH 933, 200 ft of 3/4 in Hose, 50 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, XTR™-7 Gun, 18 in Tip Extension, 180° Tip Swivel, XHD™ 519, 531 Tips and all fittings
- 16U784 – GH 933Es Big 250 System**
INCLUDES: GH 933Es with Electric Start, 200 ft of 3/4 in Hose, 50 ft of 1/2 in Hose, 10 ft x 3/8 in Whip Hose, XTR-7 Gun, 18 in Tip Extension, 180° Tip Swivel, XHD 519, 531 Tips and all fittings
- 17B488 – GH 933Es Hi Flo Big 250 System**
INCLUDES: GH 933Es with Electric Start, 50 ft of 3/4 in Xtreme-Duty Hose, 50 ft of 1/2 in Xtreme-Duty Hose, 10 ft x 3/8 in Xtreme-Duty Whip Hose, XHF Gun, 18 in Tip Extension, 180° Tip Swivel, XHD 429, 531 Tips and all fittings



QuikChange Pump Loweres

Exclusive QuikChange Pump Loweres maximize production. Easily customize your Big Rig for each coating, without purchasing additional rigs! Each QuikChange Pump Lower Kit is sold separately. Big Rig Pump Lower Kits include: Pump Lower, Tie Rods and Rod Connector. Fits GH 733, GH 933, GH 1017, GH 2570, GH 5040 units only.

QuikChange Loweres

- 16U753 – GH 733 Pump Lower Kit**
- 16U755 – GH 933 Pump Lower Kit**
- 17B489 – GH 933 Hi Flo Pump Lower Kit**
- 16U751 – GH 1017 Pump Lower Kit**
- 16U752 – GH 2570 Pump Lower Kit**
- 16U754 – GH 5040 Pump Lower Kit**



Must Have Accessories

Tough-to-spray materials often require different ways of delivering material to the pump. Our proven Direct Immersion Kits and 12 gallon Stainless Steel Hopper provide the flexibility you need to get the job done!

55 Gallon Direct Immersion Kit

- ▶ Pump right from the drum!
- ▶ Rugged steel frame
- ▶ Easy installation

- 287843 – Fits GH 733, GH 833, GH 933 and GH 5040**
- 16U764 – Fits GH 2570**

12 Gallon Stainless Steel Material Hopper Kit

- ▶ Heavy-duty, 14 gauge stainless steel hopper
- ▶ Steep sided design keeps material flowing
- ▶ Oversized, 1/12 in quick disconnect
- ▶ Includes: Hopper, Lid, Mounting Bracket, Fittings, Quick Disconnect

- 16U505 – Fits GH 733, GH 933, GH 5040**



Heavy-Duty Cordless Airless Sprayer

4000 psi in the Palm of Your Hand!

Save time, money and material with the new HD Sprayer! Designed for small jobs and touchup, it delivers a high-quality, one-coat airless finish with materials such as high-solids epoxies, polyurethanes, plural components, fire retardants, elastomers and much more. The perfect solution for nuts, bolts, piping, doors, man-ways, holidays, small parts, cut-in, punch-list items and more. **Contact your local authorized Graco Distributor for more information on how the HD Sprayer can help you save time and money!**



ACCESSORIES

Essential Tools for *Maximum* Productivity and Performance

GUNS AND GUN ACCESSORIES

HEAVY-DUTY AND MASTIC GUNS

- 241705 Heavy-Duty Gun with RAC X 531 Tip and Guard, 4000 psi (276 bar)
- 224472 Mastic Gun 36 in (.9 m) Extension, 5000 psi (345 bar)
- 237260 Repair Kit – Heavy-Duty Gun

SILVER PLUS AND FLEX PLUS GUNS

- Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
- 246240 Silver Plus Gun (2-finger) with RAC X 517 Tip and Guard
- 243283 Silver Plus Gun (2-finger) with RAC 5 517 Tip and Guard
- 235460 Silver Plus Gun (2-finger) with Flat Tip and Guard
- 235461 Silver Plus Gun (4-finger) with Flat Tip and Guard
- 235462 Silver Plus Gun Fine Finish (2-finger) with Flat Tip and Guard
- 246468 Flex Plus Gun (2-finger) with RAC X 517 Tip and Guard
- 235474 Repair Kit (Silver Plus, Flex Plus)

XTR GUNS

XTR-5 Airless Spray Gun, 5000 psi (345 bar, 34.5 MPa)

- XTR500 1 in round handle, four-finger trigger, no tip
- XTR501 1 in round handle, four-finger trigger, 519 flat tip
- XTR502 Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR503 Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR504 1 in round handle, four-finger trigger, 519 XHD RAC tip
- XTR505 1 in round handle, two-finger trigger, 519 XHD RAC tip

XTR-7 Airless Spray Gun, 7250 psi (500 bar, 50 MPa)

- XTR700 Round handle, four-finger trigger, no tip
- XTR701 Round handle, four-finger trigger, 519 flat tip
- XTR702 Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR703 Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR704 Round handle, four-finger trigger, 519 XHD RAC tip
- XTR705 Round handle, two-finger trigger, 519 XHD RAC tip

Xtreme-Duty High Pressure Gun Accessories, (Fit both XTR-5 and XTR-7 Spray Guns)

- 246294 10 in (254 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)
- 246295 15 in (380 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)
- 246296 18 in (457 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)
- 246297 180° Spray Nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa)
- 248837 Gun Repair Kit (includes gasket, needle and seat)
- 287449 Four-finger Round Trigger Kit
- 287450 Two-finger Trigger Kit
- 287451 Four-finger Oval Insulation Trigger Kit
- 287032 Filter, 60 mesh
- 287033 Filter, 100 mesh
- 287034 Filter, 60 and 100 mesh combination
- 247634 Seal Kit, GHD conversion (5-pack)
- 262854 XHF Gun, Includes XHD 429 tip

GUN SWIVEL

- 189018 Gun Swivel rated to 7500 psi

EXTENSIONS

- Includes: RAC X HandTite Guard Standard with 7/8 in (22 mm) Gun Nut and OneSeal
- Maximum Working Pressure: 4050 psi (280 bar, 28.0 MPa)

- 287019 10 inch (25 cm)
- 287020 15 inch (38 cm)
- 287021 20 inch (50 cm)
- 287022 30 inch (75 cm)
- 246294 10 in (254 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)
- 246295 15 in (380 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)
- 246296 18 in (457 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)

SPRAY NOZZLE

- 246297 180° Spray Nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa)

SPRAY TIPS AND GUARDS

RAC X TIPS AND GUARDS

- LTX-XXX RAC X SwitchTips, Blue (Odd #)
 - ▶ Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa)
- WR-XXXX RAC X Wide RAC SwitchTips, Blue (Odd #)
 - ▶ Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa)
- 246215 RAC X HandTite® Guard
 - ▶ 7/8 in (22 mm) thread size, standard Graco thread
- 246437 RAC X HandTite Guard
 - ▶ 11/16 in (17 mm) thread size, older style Graco pole guns, fits competitive guns with 11/16 in (17 mm) threads
- 286-XXX RAC® 5 SwitchTips, Black (Odd #)
 - ▶ Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa)
- 243161 RAC 5 HandTite Guard
 - ▶ 7/8 in (22 mm) thread size, standard Graco thread
- 243263 RAC 5 HandTite Guard
 - ▶ 11/16 in (17 mm) thread size, older style Graco pole guns, fits competitive guns with 11/16 in (17 mm) threads

XHD TIPS AND GUARDS

- XHD-XXX XHD SwitchTips, Gray (Odd #)
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50.0 MPa)
- XHD001 XHD RAC Guard
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50.0 MPa)
- XHD010 Seal and Seal Kit (5-pack)

BLUEMAX II AIRLESS HOSE *Feel the Difference in Flexibility!*


- 238358 3/16 in x 3 ft (4.8 mm x 0.9 m) 3300 psi (227 bar) BlueMax II Airless Whip Hose
- 238959 3/16 in x 4.5 ft (4.8 mm x 1.4 m) 3300 psi (227 bar) BlueMax II Airless Whip Hose
- 240793 1/4 in x 25 ft (6.4 mm x 7.5 m) 3300 psi (227 bar) BlueMax II Airless Hose
- 240794 1/4 in x 50 ft (6.4 mm x 15 m) 3300 psi (227 bar) BlueMax II Airless Hose
- 240797 3/8 in x 50 ft (9.5 mm x 15 m) 3300 psi (227 bar) BlueMax II Airless Hose

XTREME-DUTY HIGH PRESSURE WHIP HOSE

- Maximum Working Pressure: 4000 psi (276 bar)
- 277249 1/4 in x 3 ft (6.4 mm x 0.9 m) MxF Whip Hose
- 277250 1/4 in x 50 ft (6.4 mm x 15 m) FBE
- 277351 3/8 in x 3 ft (9.5 mm x 0.9 m) MxF Whip Hose
- 277251 3/8 in x 50 ft (9.5 mm x 15 m) FBE
- 277253 1/2 in x 50 ft (13 mm x 15 m) FBE

Xtreme-Duty High-Pressure Hoses

4500 psi 5600 psi 7250 psi

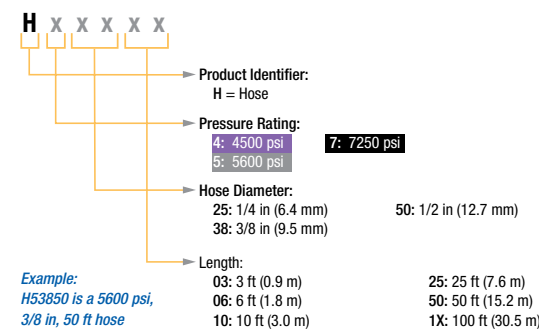

3/4 IN XTREME-DUTY HIGH PRESSURE HOSE

- H77550 3/4 in x 50 ft (6.4 mm x 15 m) FBE Xtreme-Duty High Pressure Hose
 - ▶ Maximum Working Pressure: 7250 psi (500 bar)

Choose the Right Hose for the Job

Technical Specifications

- Working Pressure 4500 psi (310 bar), 5600 psi (386 bar), or 7250 psi (500 bar)
- Temperature Rating (all sizes) -40° to 180°F (-40° to 82°C)
- Chemical Resistance Hose cover resistant to a wide variety of solvents, acids and bases
- Weather Resistance Hose cover has outstanding resistance to oxygen, ozone, sunlight and general weather conditions
- Electrical Properties Conductive hose





ACCESSORIES

KITS

GH 833 KITS

- 287843 Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket
- 249767 OEM Kit; Includes: Hydraulic Engine/Head, Displacement Pump
- 287916 Non-Solvent Siphon Kit, 1.5 in diameter x 6.5 ft (2 m) Siphon Hose
- 287915 Solvent Resistant Siphon Kit, 1.5 in diameter x 6.5 ft (2 m) Siphon Hose

GH 733, GH 933, GH 2570, GH 5040 KITS

- 287843 Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket
 - ▶ Fits GH 733, GH 833, GH 933 and GH 5040
- 16U764 Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket
 - ▶ Fits GH 2570
- 16U505 12 Gallon Stainless Steel Material Hopper Kit
 - ▶ Fits GH 733, GH 933 and GH 5040
- 287936 Non-Solvent Siphon Kit, 2 in diameter x 6.5 ft (2 m) Siphon Hose
- 17B825 GH 933 Hi Flo Big 250 Gun and Hose Kit with XHF Gun

XTREME QUIKCHANGE LOWER KITS

- ▶ Includes pump lower and three (3) tie rods; fits GH 733, GH 933, GH 1017, GH 2570, GH 5040
- 16U753 GH 733 Pump Lower
- 16U755 GH 933 Pump Lower
- 17B489 GH 933 Hi Flo Pump Lower
- 16U751 GH 1017 Pump Lower
- 16U752 GH 2570 Pump Lower
- 16U754 GH 5040 Pump Lower

MISCELLANEOUS

FLUIDS

- 243103 Pump Armor – 1 qt (1 l)
- 245133 Pump Armor – 1 gal (3.8 l)
 - ▶ Use Graco's exclusive Pump Armor for long term pump storage to prohibit harmful rust and corrosion to your sprayer.
- 206994 Throat Seal Liquid (TSL) – 8 oz (.24 l)
- 206995 Throat Seal Liquid (TSL) – 1 qt (1 l)
- 206996 Throat Seal Liquid (TSL) – 1 gal (3.8 l)
 - ▶ Prolong the life of your pump by routinely adding TSL to your pump's wet cup.
- 207428 Hydraulic Fluid – 1 gal (3.8 l)

HOSE FITTINGS

- 175013 3/4 in npt x 3/4 in npt (19 mm x 19 mm) – MBE
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50 MPa)
- 156971 1/4 in npt x 1/4 in npt (6.4 mm x 6.4 mm) – MBE
 - ▶ Maximum Working Pressure: 7500 psi (517 bar, 51.7 MPa)
- 156849 3/8 in npt x 3/8 in npt (9.5 mm x 9.5 mm) – MBE
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50 MPa)
- 158491 1/2 in npt x 1/2 in npt (13 mm x 13 mm) – MBE
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50 MPa)
- 157350 1/4 in npt x 3/8 in npt (6.4 mm x 9.5 mm) – MBE
 - ▶ Maximum Working Pressure: 6000 psi (420 bar, 29 MPa)
- 159239 1/2 in npt x 3/8 in npt (13 mm x 9.5 mm) – MBE
 - ▶ Maximum Working Pressure: 7250 psi (500 bar, 50 MPa)



Direct Immersion Kit allows ultimate flexibility with tough-to-spray materials. (Part #287843)



WARRANTY

We stand behind every piece of equipment we manufacture with the industry's strongest warranty. Spray with the confidence that you will probably never need to use Graco's warranty, but if you do... we will be there.

NOBODY ELSE BUILDS SPRAYERS LIKE THIS

3 YEAR HONDA ENGINE WARRANTY*

If the engine fails from normal use, Honda will replace it under warranty for the original owner for 3 years.

LIFETIME DRIVE TRAIN WARRANTY

If the drive train fails from normal use, we'll replace it under warranty for the original owner for the life of the sprayer.

30-DAY "JUST ADD PAINT" REPLACEMENT GUARANTEE*

Dissatisfied? Simply return the sprayer to the place you bought it within 30 days. They'll either exchange it for an identical sprayer or you can trade-up to a larger sprayer at an additional cost.



3 YEAR WARRANTY*

Coverage against defects in materials and workmanship on the entire sprayer.

DOWNTIME ELIMINATOR PROGRAM*

Part needed for a warranty repair not in stock at your distributor? Get **FREE** next business day air freight delivery when distributor orders the part by 2 p.m. CST.

CONVENIENT SERVICE

Graco offers more than 5,500 authorized distributor locations in North America and over 700 locations to administer warranty repair.

*NORTH AMERICA ONLY. See your local Graco distributors for country specifics.

BIG RIG SPRAYER SPECIFICATIONS



		GMAX II 7900 Roof Rig	GH 733	GH 833	GH 933	GH 1017	GH 2570	GH 5040
MODEL	Cart Design-Part Number	Complete-16W987	Bare Electric Start-16U279	Bare-249318 Complete-249617 Bare Electric Start-16U287 Complete Electric Start-16U288 OEM Kit-249767	Bare-16U281 Complete-16U282 Bare Electric Start-16U285 Complete Electric Start-16U286	Bare Electric Start-16U277	Bare Electric Start-16U278	Bare Electric Start-16U280
SPECIFICATIONS	Maximum gpm (lpm)	2.2 (8.3)	4.0 (15.1)	4.0 (15.1)	2.5 (9.5)	16.5 (62.5)	7.0 (26.5)	3.5 (13.2)
	Maximum psi (bar)	3300 (227)	4000 (276)	4000 (276)	7250 (500)	1000 (70)	2500 (172)	5000 (345)
	Maximum Tip Size	.048	.065	.065	.053	N/A	N/A	.067
	Engine	200 cc Honda (6.5 HP)	390 cc Honda (13.0 HP)	390 cc Honda (13.0 HP)	390 cc Honda (13.0 HP)	390 cc Honda (13.0 HP)	390 cc Honda (13.0 HP)	390 cc Honda (13.0 HP)
	Electric Start	No	Yes	Available	Available	Yes	Yes	Yes
	Charging System (Electric Start Only)	No	18 Amp	18 Amp	18 Amp	18 Amp	18 Amp	18 Amp
INCLUDES	Hose	3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless	N/A	3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless	3/8 in x 50 ft (9.5 mm x 15 m) Xtreme-Duty Airless	N/A	N/A	N/A
	Whip Hose	1/4 in x 3 ft (6.4 mm x .9 m) BlueMax II Airless	N/A	1/4 in x 3 ft (6.4 mm x .9 m) BlueMax II Airless	1/4 in x 6 ft (6.4 mm x 1.8 m) Xtreme-Duty Airless	N/A	N/A	N/A
	Gun	Heavy-Duty Blue	N/A	Silver Plus	XTR-7 Airless XTR704	N/A	N/A	N/A
	Tip	RAC X 427, 635	N/A	RAC X 517, 655	519 XHD RAC	N/A	N/A	N/A
	Filter	Easy Out	No	Easy Out	Yes	No	No	No
	Pulsation Dampener	No	No	No	No	Yes	No	No
	Siphon Set	5.0 gal Direct Immersion	1.25 in ID Nylon – 55 gal	1.5 in ID PVC – 55 gal	1.0 in ID Nylon – 55 gal	2.0 in ID PVC – 55 gal	2.0 in ID PVC – 55 gal	2.0 in ID PVC – 55 gal
	Other	18 in Tip Extension	N/A	N/A	N/A	N/A	N/A	N/A
PUMP	Interchangeable Lowers	No	Yes	No	Yes	Yes	Yes	Yes
	Pump Type	Endurance Piston Quick-Change	Xtreme Piston Quick-Change	Endurance Piston Quick-Change	Endurance Piston Quick-Change	Xtreme Piston Quick-Change	Xtreme Piston Quick-Change	Endurance Piston Quick-Change
	Packing	V-Max Blue	XtremeSeal/Leather	V-Max Blue	XtremeSeal/Leather	XtremeSeal/Leather	PTFE/Leather	XtremeSeal/Leather
	Piston Rod	MaxLife	Chromex	MaxLife	Chromex	Hard Chrome	Hard Chrome	Chromex
	Cylinder	MaxLife	Hard Chrome	MaxLife	Hard Chrome	Hard Chrome	Hard Chrome	Hard Chrome
	Tie Rod	N/A	Silver-16U336	N/A	Silver-16U336	Silver-16U336	Gold-16U339	Silver-16U336



graco.com/bigrigs



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, 200233
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 443, Augusta Point
Regus Business Centre 53
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

800-690-2894 or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Customer Service
800-690-2894
Fax 800-334-6955